


Technical Product Specification

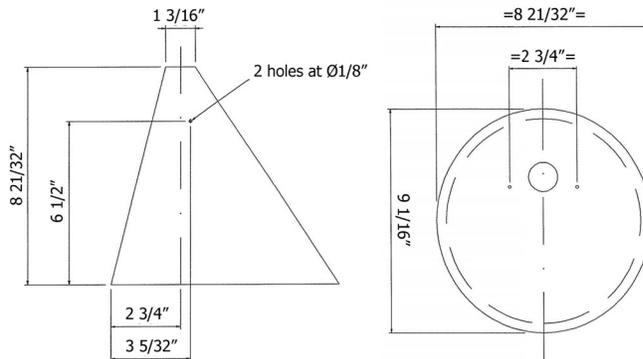

Model Number	Inside Height	Inside Length	Inside Width
FF130E	8"	8 1/4"	8"

Performance Data

For Use:

- Low profile LED recessed lights (max. wattage 13.5W)
- Insulated Ceilings
- Attic Spaces
- Ceiling Spaces
- Roof/Ceiling

General Information

Benefits:

- Fire tested in accordance with IEC 60598-1.
- Thermally tested according to UL 1598 for usage with IC and Non-IC rated low profile LED recessed downlights (Max. wattage 13.5W).
- Ultra flexible (Ideal for retrofitting applications).
- Lightweight (approx. 7 oz.).
- Reduces draft problems.
- Prevents heat loss through the fixture.
- Reduces airflow from the outside.
- Enhances the acoustic protection of the ceiling.
- Prevents insects and other small animals from entering through the light.
- Easy to fit without special tools.
- Maintenance free.



TENMAT FF130R LED Recessed Light Covers are fire resistant enclosures that were specifically designed to keep insulation from low profile LED recessed lights in retrofitting applications.

The ultra flexible nature of the material allows the cover to get rolled up for easy retrofit, remodel or new construction installation from below the ceiling to protect modern low profile LED light fixture from insulation and to stop unwanted airleakage through the light fixture.

